


OLS-380



Outrigger Load Measurement


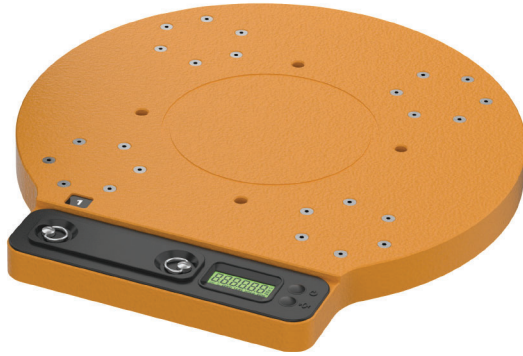


Key Features

- Replaceable Battery
- Load Center of Gravity Analysis
- Supports Various Outriggers
- IP68 Waterproof & Dustproof
- Works with NRWI Indicator

Applications

- Crane Vehicle Stability
- Fire Ladder Truck Safety
- Aerial Work Platform Stability
- Special-Purpose Vehicle Safety

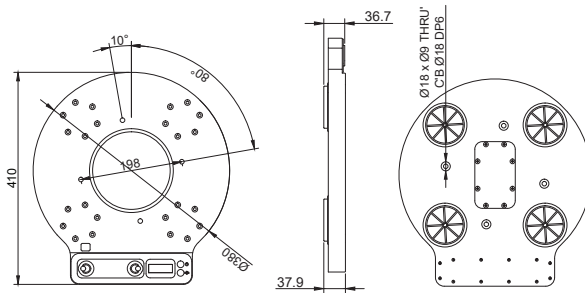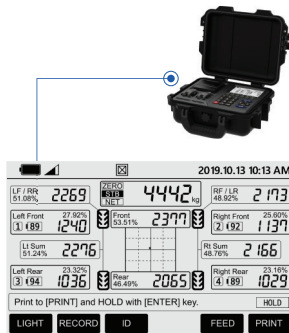

Specifications

Model	OLS-380	
Max Capacity (kg)	20000	30000
Readability (kg)	20	20
Display	6-digit FSTN LCD (11 mm character height), LED backlight	
Input Method	2 capacitive touch keys	
Case Material	Aluminum	
Ramp / Dummy	N/A	
Wireless	ZigBee (IEEE 802.15.4, typical range: 30 m (max. 300 m))	
Protection Rating	IP68	
Battery	Replaceable Li-ion battery, approx. 56 days (8 h/day, max. 450 h), charger included	
Charger Input	5 VDC, 1.5 A SMPS	
Temperature / Humidity	-20 to 60 °C / 85% RH (Non-condensing)	
Weight	11.4 kg	

Options None